


# POWERCHOCK 3

PORTABLE WHEEL RESTRAINT SYSTEM



## PROTECT YOUR LOADING DOCK PERSONNEL

POWERCHOCK 3 is an easy-to-handle wheel restraint system, highly suitable for narrow spaces between loading docks, providing outstanding value.

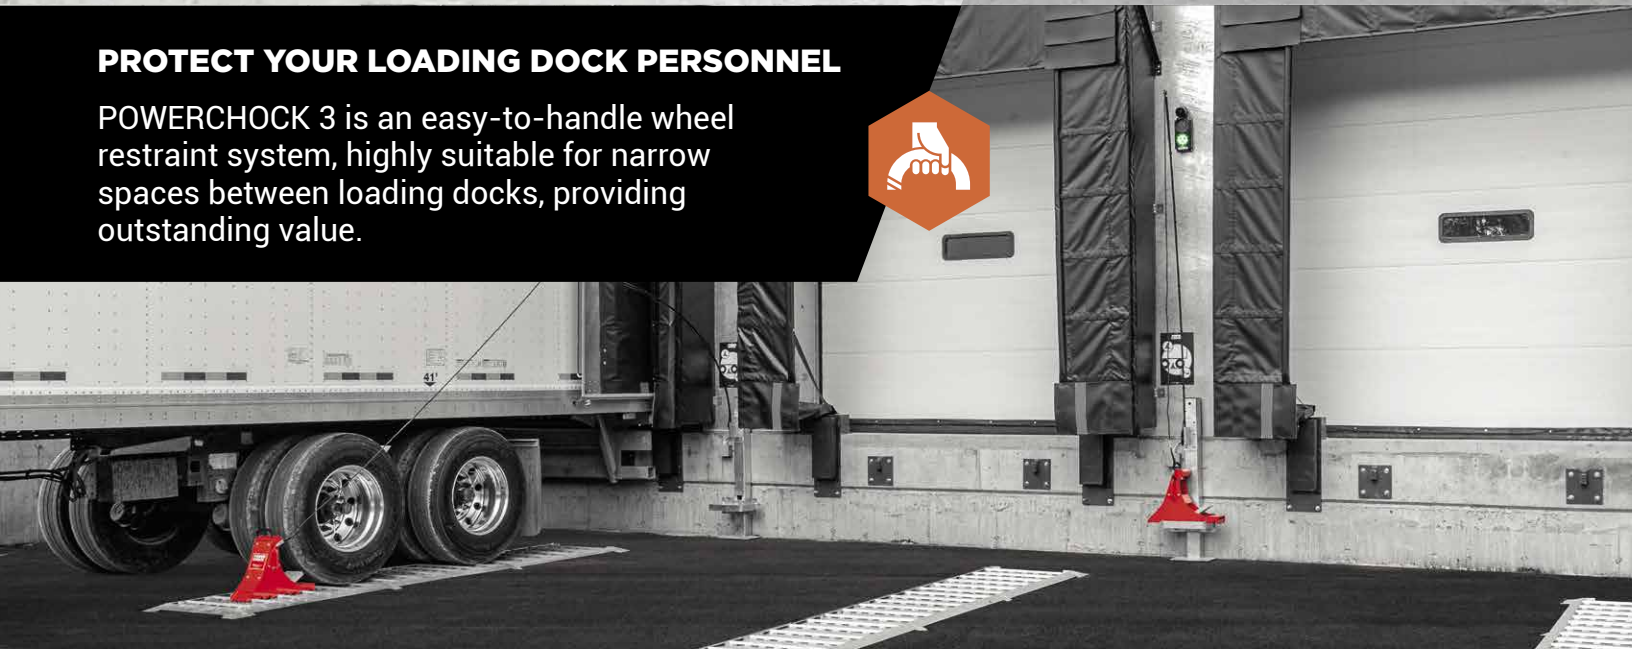



**EXCLUSIVE**



**WARRANTY**

- RUGGED**
- RELIABLE**
- EASY-TO-HANDLE**



**QUALITY & ROBUSTNESS**



**WINTER RESISTANT**



**LOWEST TCO**



**UNIVERSALLY COMPATIBLE**



**ALL GROUNDS & SPACES**




**RAPID & INTUITIVE**

## TECHNICAL SPECIFICATIONS

## POWERCHOCK 3

- ◆ High-tensile steel wheel chock linked to a control box via communication cable installed on a flexible pole.
- ◆ Two sections (totalling 7.9 feet) of hot-dip, galvanized steel, ground-fixed restraining plate, in the dock bay area. Third section of restraining plate optional.
- ◆ 2 sensors linked to an audiovisual communication system:
  - Equipped with wheel sensor inside chock to confirm proper wheel chock placement
  - Dock sensor to confirm door closure
- ◆ Communication system equipped with indoor control box, visual indicators (red/green LED lights), and audible alarm. "Chock engaged" indicator light and self-diagnostic function included. Also equipped with exterior LED traffic lights and an audible alarm.
- ◆ For easier handling by the driver, the trolley is an available option. "Chock engaged" indicator light and self-diagnostic function included. Also equipped with exterior LED traffic lights and an audible alarm.

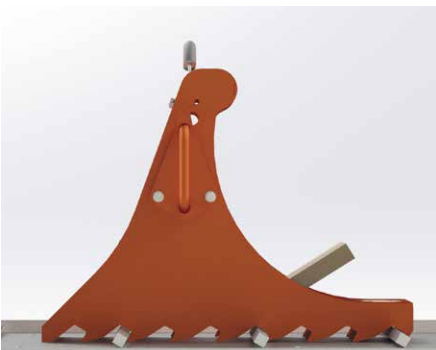

Height	15 <sup>3</sup> / <sub>4</sub> in
Length	21 <sup>1</sup> / <sub>4</sub> in
Width	6 in
Weight	28.6 lbs

Additional heights and widths available.

DETAILS & VIDEOS AVAILABLE HERE

