


# POWERCHOCK 5

ERGONOMIC WHEEL RESTRAINT SYSTEM



## PROTECT YOUR LOADING DOCK PERSONNEL

With the use of an ergonomic articulated arm, the operation of the POWERCHOCK 5 is virtually effortless for all drivers.

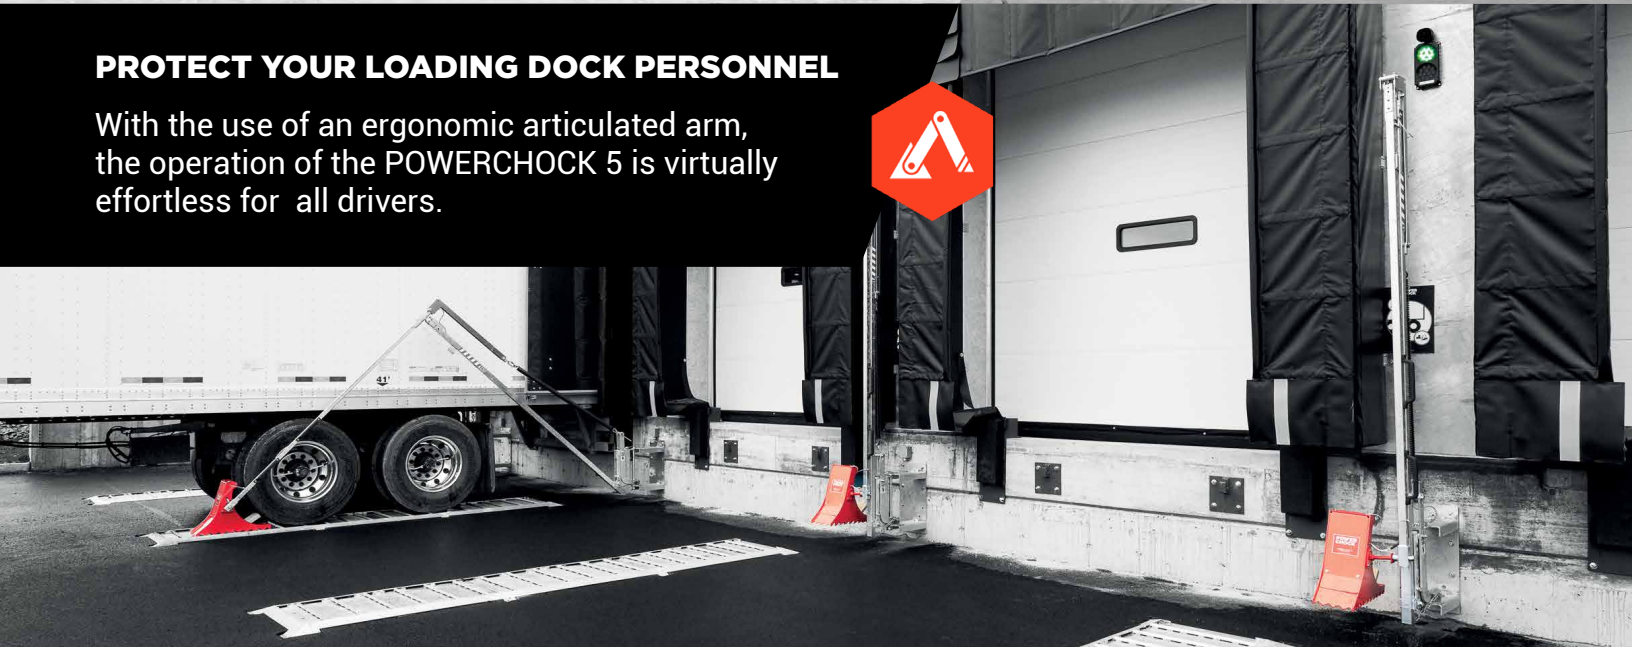



**EXCLUSIVE**



**WARRANTY**

- RUGGED**
- RELIABLE**
- EASY-TO-HANDLE**



**MAINTENANCE-FREE**



**WINTER RESISTANT**



**LOWEST TCO**



**UNIVERSALLY COMPATIBLE**



**ALL GROUNDS & SPACES**




**RAPID & INTUITIVE**

## TECHNICAL SPECIFICATIONS

## POWERCHOK 5

- ◆ High-tensile steel wheel chock installed on an ergonomic articulated arm.
- ◆ Three sections (totalling 12 feet) of hot-dip galvanized steel, ground-fixed restraining plate, in the drive approach.
- ◆ 3 sensors linked to an audiovisual communication system:
  - Equipped with wheel sensor inside chock to confirm proper wheel chock placement
  - Dock sensor to confirm start and completion of loading
  - Sensor to confirm return of arm to resting position on the wall
- ◆ Communication system equipped with indoor control box, visual indicators (red/green LED lights), and audible alarm. "Chock engaged" indicator light and self-diagnostic function included. Also equipped with exterior LED traffic lights and an audible alarm.

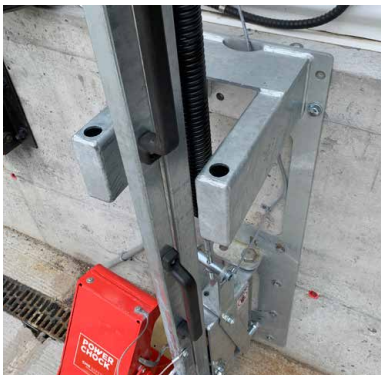

Chock Height	19 in
Lifting Effort	22 lbs
Handling effort	+/- 12 lbs

Additional heights available.

DETAILS & VIDEOS AVAILABLE HERE

